

LD-100-RS, LD-200-RS Heavy-Duty Label Dispensers

Meet the new **RS-Type Automatic Label Dispensers** with enhanced label sensing and easy set-up.


The **LD-100-RS** and **LD-200-RS** Label Dispensers advance the state of the art with new convenience and durability. Using the latest opto-electronic technology, there is just one simple adjustment for label length. A special Reflective Sensor sits below the label and reliably and accurately senses the leading edge of your label. As you pick up a label the next one is automatically and instantly advanced. The modern design presents the label right at the front of the machine, providing optimum convenience for both left-handed and right-handed operators.

To set up the unit, you just slide your roll of labels onto the built-in Core Holder. Then thread the label web through to the take-up spindle and your Label Dispenser is ready for use.

A “HIGH-LOW” Speed Switch plus an adjustable sensor further enhances the versatility of these products.

There are no mechanical position switches to cause adjustment or operational problems. The heavy-duty product design will stand up to the most demanding environments. Designed for all-day, every day use, the **LD-100-RS** and **LD-200-RS Automatic Label Dispensers** are backed by LABELMATE’s famous **3-Year Parts and Labour Limited Warranty**, assuring you trouble-free performance.

NEW! The **LD-100-RS-SS** and **LD-200-RS-SS** are totally made of stainless steel and can be used in humid environment.

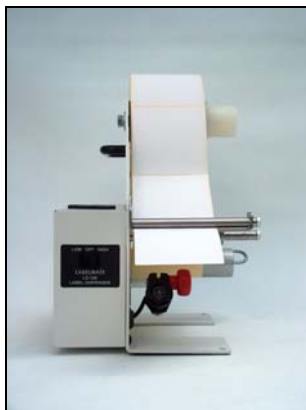

LD-100-RS

KEY FEATURES

- Easy access to dispensed labels.
- Equally convenient for right and left handed operators.
- Works with very short labels (6 mm).
- Small footprint.



LD-100-RS with Flanges and Counter



LD-100-RS-SS

MODEL	DESCRIPTION	LABEL WIDTH	LABEL LENGTH	SPEED (mm/sec)	ROLL DIA.
LD-100-RS	Automatically advances the next label ready to pick. Fast label loading. Quick and convenient operation! Not for transparent labels.	Up to 115-mm (Up to 4.5" max.)	6- to 150-mm (0.24" to 5.9" or more.)	110 mm min.	220-mm (8.6" max.). Core I.D. 1.5" to 3"
LD-200-RS	Same features as LD-100-RS, but with wider label capacity.	Up to 165-mm (Up to 6.5" max.)			
LD-100-RS-SS	Same features as LD-100-RS but in stainless steel.	Up to 115-mm (Up to 4.5" max.)			
LD-200-RS-SS	Same features as LD-200-RS but in stainless steel.	Up to 165-mm (Up to 6.5" max.)			
LD-FLANGES-220	Optional aluminum Flange Plates suggested for use with narrow labels that may have a tendency to telescope or fall off the core. Set of 2 Flanges for LD-100-RS or LD-200-RS.	-	-	-	-
LD-FLANGES-300	Optional aluminum Flange Plates suggested for use with narrow labels that may have a tendency to telescope or fall off the core. <u>To be used with LD-DE.</u> Set of 2 Flanges for LD-100-RS or LD-200-RS.	-	-	-	-
C-1	Optional Label Counter for LD-100-RS & LD-200-RS. (Factory installed)	-	-	-	-
HS-PS	High-speed power supply to increase speed of the dispenser.	-	-	140 mm/min.	-
LD-DE	Diameter extension: Allows to use rolls with outer diameters up to 300mm.	-	-	-	300-mm (11.8")

Size: H x W x D Approximately 229-x 305-x 229-mm (9-x 12-x 9-inches).

Shipping Weight: Approximately 6.4- to 6.8-kg (14- to 15-lbs).

Power: 230-vac 50-Hz 40-wa. 120-vac 60-Hz power supply is also available.

Specifications are subject to change without notice. DataLD100RSEur 03/2006